



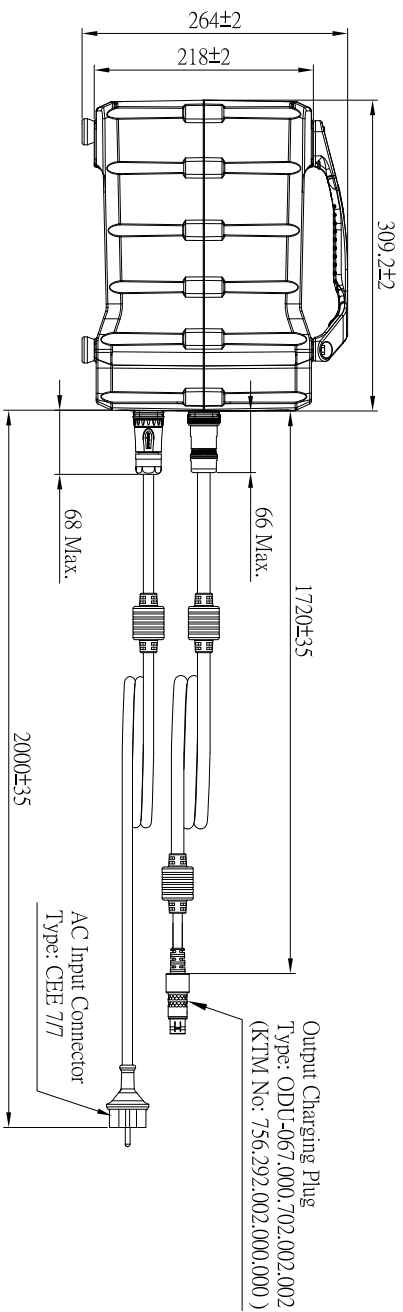
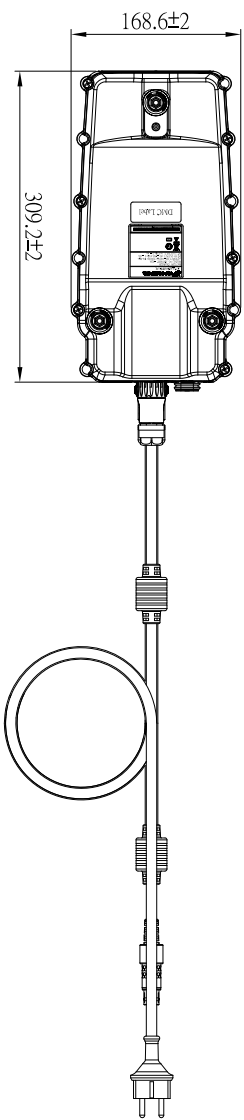
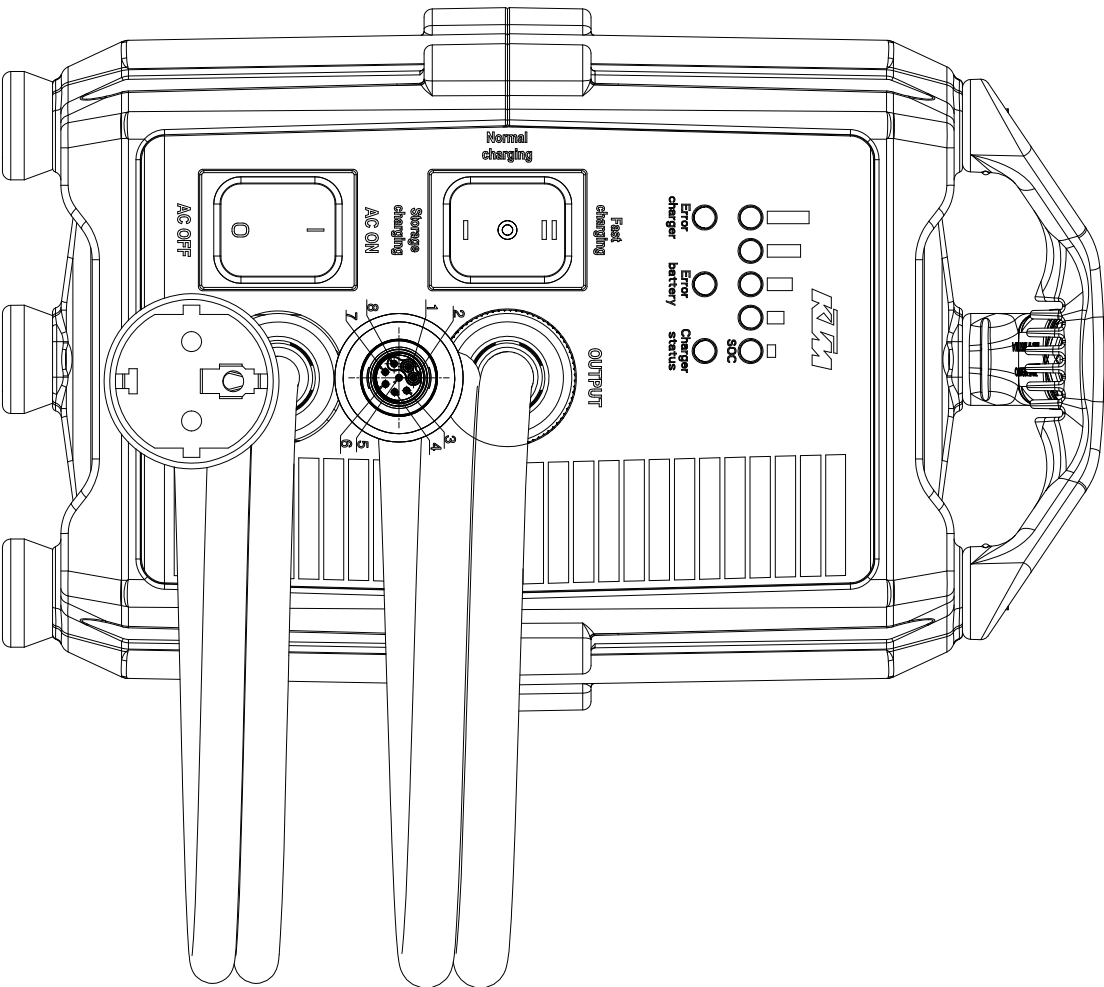


NOTES:
1、UNIT:mm
2、Product surface should be clear, without
burs oil and pressure indentation .


MODEL NO.: FSP2800C-2001		TITLE: MECHANICAL		SHEET: 1 OF 3 REV:02	
RD: RAZTC	APPD	CHKD	DRAW	DATE	
FIRST ANGLE PROJECTION	刘俊	杨清霞	VO Sheng	AUG.28,2020	
INTERIOR COUNTERSIGN:					

1. Modify the AC Input Cable distance from 2000±3 to 2000±5
2. Modify the DC Output Cable length and distance from 1700±5 to 1720±5
3. Modify the DC Output Cable length and distance from 1700±5 to 1720±5
4. Add SP to CBB connector

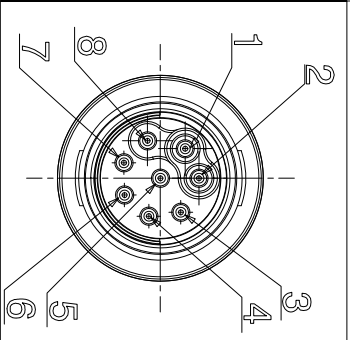

Output Charging Plug(ODU-067.000.702.002.002) Pin definition			
Plug View		Pin No.	Color
		1	Black
		2	White
		3	Brown
		4	Blue
		5	Yellow/Green
		6	Pink
		7	Gray
		8	Red
			Net
			HV+
			HV GND
			LV+
			LV GND
			PE
			CAN H
			CAN L
			Interlock

MODEL NO. : FSP2800C-2001		TITLE: MECHANICAL		SHEET: 2 OF 3		REV:02
RD: RAZTC	APPD	CHKD	DRAW	DATE		
FIRST ANGLE PROJECTION	比例	标准图	Yao Xiang	Aug.28.2020		
INTERIOR COUNTERSIGN:						

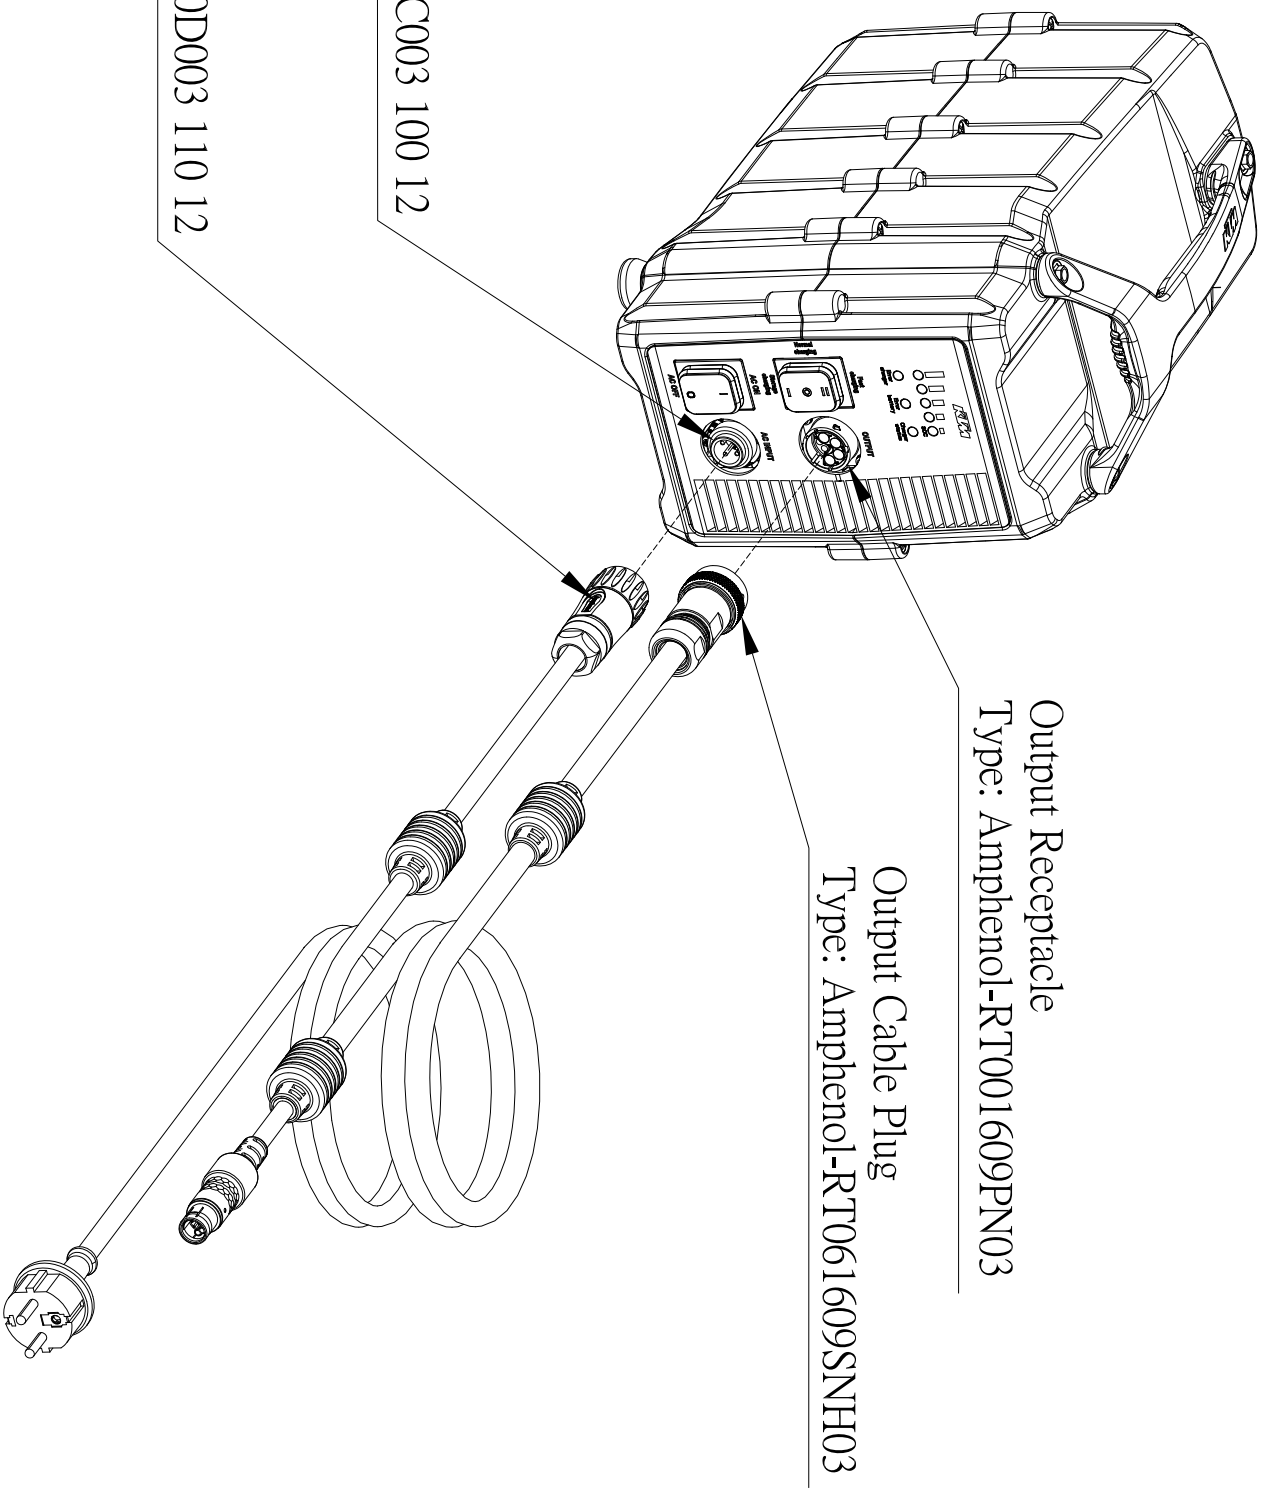

MODEL NO. : FSP2800C-2001	TITLE: MECHANICAL			SHEET: 3 OF 3	REV:03
RD: RAZTC	APPD	CHKD	DRAW	DATE	
FIRST ANGLE PROJECTION	刘俊	杨朝晖	VO Zhang	Aug.28.2020	
INTERIOR COUNTERSIGN:					